

Pulsar2 v2.73

01. Dec. 2009.

User's Manual, web:www.astronomy.hu/pulsar2.html

SAFETY	2
GENERAL	2
QUICKSTART	3
Hand Controller Menu navigation.....	3
Information on the Display.....	3
Initializing.....	4
USING THE INTELLIGENT FEATURES	4
Home position.....	4
Swap tube (Meridian flip).....	5
Pole Crossing.....	6
GoTo.....	6
Using your GPS.....	7
Remote Operation.....	8
ASTROPHOTOGRAPHY	9
USING PULSAR2 WITH A PC	9
Upgrading the firmware.....	10
PROGRAMMING PEC	10
HAND CONTROLLER MENU	11
TROUBLESHOOTING	16
KEY TO THE ICONS OF THE KEYBOARD	17
LX200 COMPATIBILITY	18
AUTOGUIDER PORT	18

AUXILIARY PORT (8 PIN).....	18
CATALOGUE DATA DOWNLOAD.....	19
Catalogue data download (the catalogues are in Excel csv format).....	19
Example for database structure.....	19
HARDWARE OPTIONS.....	20



Safety

The unit is protected against reverse polarity, short circuit of the motor cables and overvoltage. The power cable is fused at 6,3Amp (slow). Removing the motor cables during use will not damage the circuits. If you feel vibration at the DEC motor in standstill, your power supply is noisy. The unit runs from 12 - 24V DC (max recommended value) and draws 2A max during a GoTo. There is a low voltage warning below 10V (@ on display+beep). All cables can be unplugged/plugged also when the unit has been powered.

General

Pulsar2 is a universal drive controller that can be user programmed for a wide range of mounts fitted with servo or bipolar stepper motors. It will work with motors only or motors + incremental encoders. The unit is LX200 and ASCOM compatible, thus you can use it with your favourite Planetarium Program (Carte

du Ciel, Guide, Desktop Universe, The Sky, etc) and other sw like PemPro, CCD Autopilot, etc..

Pulsar will work as a standalone driver using the hand controller or connected to a PC (no hand controller is needed). If connected to a PC Pulsar2 can be reached through the ASCOM platform or by setting the mount type to LX200 (non GPS) or via the Pulsar Commander (download from www.astronomy.hu/pulsar2.html).

To start using Pulsar2, connect the hand controller, mount and power. There is no power switch, you will either unplug power or send the mount to parking and leave it powered until next use.

PEC on Pulsar2 will only work if the dedicated encoder is fitted to the RA worm.

Quickstart

Hand Controller Menu navigation

Use the keypad to reach the menus. The North and South push of the Joystick navigates the menu up and down, the West push is Enter (yes), the East is Esc (no). The button CE also has the Esc function. Icons give a clue to the menus. The controller has a multi level menu structure but most important functions are directly accessed by pressing a button (see p.17 for more info).

Information on the Display

The 2x16 character LCD shows Right Ascension (hh,mm,ss and decimals) and Declination (dd,mm,ss). Please note that the last digit may change abruptly due to rounding errors!

R/r shows the status of the joystick swap mode in RA. Upper case is the default.

Rp pole crossed (12h added to the RA value)

D/d shows the status of the joystick swap mode in DEC. Upper case is the default.

p=PEC ON

r=refraction correction ON

e/w shows which side of the Meridian the tube is.

S=Stopped (autostop function, select Sidereal rate to exit!)

@=Low voltage

! = signal from PEC encoder received.

If you press the side button (maplight) the [RA worm position counter](#) value appears at top left and the effect of refraction is removed from the values of the coordinates (for information only, values are not actually changed)

IMPORTANT NOTE

Before first use you must check and enter correct date and time (in UT) and your geographical Lat/Long in decimal format. This is necessary for the correct operation of the driver.

Initializing

Initializing - this is the first step of use. It aligns the telescope with the equatorial coordinate system. Pulsar2 uses a one star alignment. You must do it every time you set the telescope up in a new position. Polar align the mount first! For permanent setup it is enough to do it once (if you shut down by parking the mount).

If you have a G40, 41 or 42 mount you can just follow the instructions on the display after powering the unit up. If you have a different mount, check the mount parameters and enter the correct values. When done, power off/on and proceed as suggested above!

ATTENTION!!!

If you want to use Swap tube and the Autostop global functions you **MUST** initialize using the Hand Controller OR the virtual Hand Controller (PC) OR the Pulsar Commander Init menu (PC)! Using a planetarium software is **NOT** sufficient.

Please always initialize the mount in the Southern half of the sky (from E to W)! This is necessary for the correct evaluation of the autostop limits.

Note: you can initialize using an LX200 compatible planetarium program but in this case the controller will miss the Meridian position info. This will lead to incorrect Swap tube and Autostop operation with a German Equatorial mount. Fork mounts do not need meridian information and can be initialized from a planetarium program.

Using the Intelligent Features

The features covered in this paragraph are: [Home position](#), [GoTo](#), [Swap tube](#), [Pole crossing](#), [GPS use](#), [Remote operation](#).

Home position

Home position is a parking position where the telescope/mount is left when out of use. When the unit is switched ON it is ready for use without initializing. It is a necessity in an observatory but useful in the field too.

To program the home position:

1 Initialize (on a star in the Southern half of the sky) if not yet done

- 2 Slew the mount to the desired parking position (the tube must point in the Southern sky and at least a few degrees above the horizon)
- 3 Enter the Setup/User Parameters/Home position menu and save the position

When you finish the observing session press the Home button for 3 sec. and the mount goes to its parking position, then stops the motors. If you have enabled refraction correction there will be a small motion after the motors have stopped - this is the compensation for refraction.

You can also park/unpark the mount using PulsarCommander or any other suitable sw that uses the Ascom platform.

Now you can switch power OFF or alternatively, leave it On. Power consumption will be minimal in standstill.

To start a new session simply switch power ON and go! If you have left power on, press the home button for 3 sec. To enhance positioning accuracy you can fine tune the internal clock (see the Hand Controller menu overview).

Note: please avoid a precisely N-S position of the DEC axis as home position! This may lead to false E/W information at startup. If you have programmed the autostop limits, the home position must be within the limits. Parking will not remember the side of meridian where you have set the parking position. It will park the mount on the side of the tube where it was at the moment of the parking command.

Swap tube (Meridian flip)

This command takes the tube from one side of the mount to another. [Swap tube](#) is activated by pressing the bottom left button for 3 sec. This function works only if the tube is already approaching the mount head (in other words the tube and the object are on the same side of the Meridian). In any other case the command is not accepted (for safety reasons). After the flip is completed the telescope points at the same position as before.

To have an [accurate Swap tube](#) it is important to check the orthogonality (at 90 degree) of the DEC and tube optical axis (see the G-41/42 manual for details). A precise polar alignment is a must.

If the DEC axis starts turning the tube when the RA turning starts the tube might hit the mount. To avoid this there is a programmable [delay](#) for the DEC motion. This is programmed in the [Swap tube](#) menu.

Pole Crossing

Reaching the Northern sky may be very difficult if you must rotate nearly 180 degree in RA. Instead, crossing over the Pole provides simple access. When you give a GoTo command the software optimises the route and decides if it is more economic to approach the target by crossing the Pole or rotating the Hour axis and staying on the same side of the Pole. You can enable this feature in the Pole Crossing menu. The diagram below helps visualizing this feature. If you disable pole crossing some sky positions will not be accessible, depending on the autostop limits.

Pole crossing is set in the Setup/User Parameters/Pole crossing menu.

If you need to use [Pole Crossing](#) the Autostop limits must be set so that at either side (E,W) of the mount [turning the tube over to North is possible!](#) Otherwise a Pole Cross command near one of the Autostop limits may result in a crash.

GoTo

German equatorial mounts do not provide free access to all sky positions because the telescope can hit the pier/mount (or the mount hits itself) as it moves away from the Meridian.

Pulsar2 has the foollowing GoTo modes (selectable in user parameters menu):

- 1) horizon – commands below the horizon are rejected
- 2) normal – autostop global user programmed limits are respected + horizon. Use this mode if your telescope is controlled by sw like CCD Autopilot or ACP and lave the limit at the default value.
- 3) pulsar2 logic – an advanced goto management that selects the optimum track for each goto (try it and have fun!).

Only normal mode (2) needs user programming which is described below.

With the Autostop global feature you can teach the controller the limits on both sides of the meridian and it will respect these limits during Goto commands. You will be able to slew across the limits manually.

With the scope pointing at 0deg Declination in most cases a 360 deg rotation in RA is possible. However, above a certain **DEC value** there is the danger of a crash.

To program the limits, do the following:


- 1 initialize (e.g. on the Eastern side) as described above
- 2 slew to the desired Eastern stop position (e.g.: 1 hours East of the Meridian a [The Gemini Product Video](#) helps visualizing these stop positions.

- 4 enter the Setup/User Parameters/Autostop Global menu and save the RA limit
- 5 press the bottom left button for 3s to swap the tube (if a manual swap is made the driver must be initialized again)
- 6 slew to the desired Western stop position (e.g.: 1h30m West of the Meridian)
- 7 repeat step 4 and activate the Autostop function (Yes)
- 8 enter the Pole crossing menu and activate it (Yes)

Now if you make a Goto that is over any of the autostop limits, the mount crosses the pole first, then makes the Goto. If you leave the mount tracking, it will stop at the Western limit. Coordinates are not lost but updated when Sidereal rate is selected.

The Autostop Diagram shows the forbidden (red) zone for the DEC head of the mount. The red arrow indicates the programmed Western RA limit. For the Eastern tube position the diagram is approx. symmetrical to the Meridian. This is just an example.

The No Go area North of the red limits is reached by crossing the Pole.

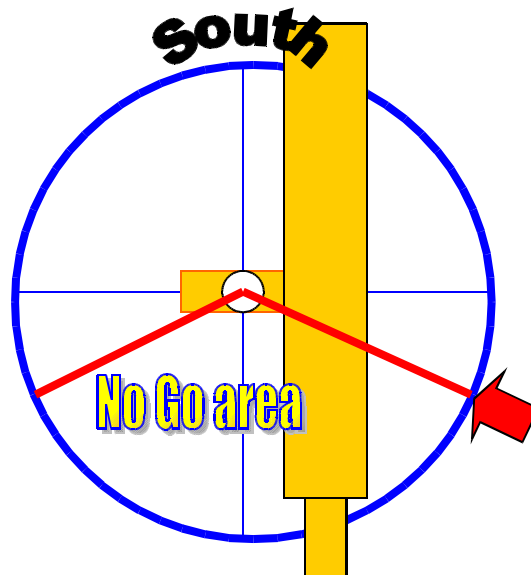

Using your GPS

The Pulsar2 controller accepts serially connected GPS units using the (4800 baud) NMEA protocol (a GPS receiver is not sufficient!!). Pulsar2 will ask for the UT and geographical coordinates if prompted. This feature allows for the trouble free use of the intelligent features when you are travelling to dark sky locations. You will need a special cable for connection. The 8 pin Aux (iliary) connector has the necessary contacts.

1. Make sure that you have selected NMEA 4800 baud as the communication protocol (Setup/Interface menu on the GPS)!
2. Let the GPS collect the navigation signal, connect it to the Pulsar2 Aux port (with the adapter)!
3. Enter the GPS menu (user parameters). Pulsar will acknowledge GPS data. Now you can remove the cable and use the driver.

You will need a dedicated cable (available from Gemini or DIY) to connect your GPS to Pulsar2 with the serial cable available from the GPS manufacturer.

Remote Operation

The German Equatorial mount is not the best choice for a remotely operated telescope but after programming the autostop limits safe operation and access to all sky positions is possible with Pulsar2. The only drawback - compared to fork mounts - is the longer GoTo time in some cases and the reduced pointing accuracy that is the result of auxiliary motions.

It is recommended to use reduced GoTo speeds (e.g.:RA3000, DEC4000) and **lightly locked** slip clutches in remote mode. If refraction correction is used, the correction will be executed within 10 sec of the last GoTo. If you start an exposure without a delay the image might be trailed. Use the Ascom driver with observatory automation sw.

Generally speaking, to automate an observatory you will need to have PC control of the following:

- Dome/roof opening and closing, rotating
- Surveillance webcam
- Robotic Focuser (and rotator)
- Tube dustcap opening/closing
- Cloud sensor

An independent (e.g.: laser beam attached to the tube) home position sensor will add extra security in an emergency.

A UPS is necessary to prevent unwanted system shutdown.

Astrophotography

Recommended settings

For guided astrophotography set a guide speed of 2-5, depending on the pixel resolution! (2 for 1"/pixel) Your system is well tuned if the residual guiding errors after each correction do not exceed 0.1 - 0.3 pixel. The smallest accepted correction time is 0,02sec.

The **Stop Current** (Setup/Mount parameters/Stop current) should be close to the **Tracking Current** (e.g.:750mA – 950mA).

Guiding hints

A pixel resolution smaller than 1"/pixel will not result (under normal sky conditions) in more image detail but more trouble and longer exposures only. It is strongly recommended NOT to go below the actual seeing conditions with the image scale. Alternatively you should set the low threshold for guiding at a higher value during poor seeing conditions. The reason is that seeing changes star positions faster than guiding, so frequent guiding will increase blurring rather than decreasing it. Seeing should be evaluated with the actual imaging instrument as it will vary with aperture (changes significantly above cca. 15cm due to the size of air cells).

For unguided photography program the PEC, use Refraction Correction and set the Stop Current at a value within 10% of the Tracking Current or the same. To get the highest possible tracking precision, programming the PEC at the actual sky position is recommended.

Before using an autoguider cable make sure that it has the correct pinout and orientation! An alternative to cable guiding is the LX200 connection.

Using Pulsar2 with a PC

First install the USB driver (available at the Pulsar2 site). Check in My Computer/Properties/Hardware/Device manager the number assigned to the virtual COM port and set this number in Pulsar Commander or any other software that needs to connect to Pulsar2. It is recommended to set the computer time to UT, the time format to 24h, to disable daylight saving time correction and regional settings to UK. Only one program at a time can connect to Pulsar2.

You have the following choices for controlling Pulsar2.

- 1) Pulsar Commander – to load databases, set parameters, parking and unparking, etc.
- 2) The ASCOM platform, after installing the Pulsar driver (available from the Pulsar site),
- 3) Any planetarium software, either by selecting LX200 (non GPS) or ASCOM telescope.

Upgrading the firmware

Install SamProg (available from the Pulsar2 site) on the PC. Get the latest binary file (firmware) from the Pulsar2 site. Then proceed **exactly** as written below:

- 1) Switch Pulsar2 ON
- 2) In the Setup/System/Upgrade menu select Yes
- 3) wait cca 10sec, until you hear a double beep
- 4) Switch Pulsar2 OFF
- 5) connect Pulsar2 to the USB port of the PC
- 6) Switch Pulsar2 ON
- 7) open SamProg (you must see: Active connection 1)
- 8) browse and select the latest binary file
- 9) click „write flash” in SamProg
- 10) wait until done
- 11) click „exit” in SamProg
- 12) switch Pulsar2 OFF and ON
- 13) you are ready now (your settings and PEC remain unchanged)

Programming PEC

PEC will work only with an installed worm encoder, standard on Gemini mounts.

To program PEC you have the following options.

- 1) Use the hand controller to enter the PEC/New Pec menu and guide manually until you hear the double beep. Alternatively you can guide with an autoguider. In this case the autoguider must already be guiding when you enter the PEC menu. You may use the virtual hand controller of Pulsar Commander for the above operation.
- 2) Use PemPro to get an accurate PE curve and load this to Pulsar. You will need the latest Ascom driver for Pulsar2 installed and the latest version of Pempro.

During the learn period the display shows the corrections you have made and the worm counter position. You can check the counter position at any time during normal tracking by pressing the lamp button at the side of the hand unit.

The learning period is 1 worm rotation. There is a 10 sec waiting period before learning starts (beep) and a double beep at the end.

Hints for programming PEC

Choose a night with absolutely no wind and good seeing!

Use a crosshair eyepiece with at least 500x magnification!

Position the telescope around 0 deg. Declination and near the Meridian (PE is the largest here, but drift due to refraction is small)!

Polar align precisely, make a reference and enable refraction correction!

Set the Guide speed to match your magnification (e.g.: 500x - 3)!

The PEC learn algorithm accepts input from the USB port (LX200), the autoguider connector and naturally the joystick.

Hand Controller Menu

In the tables below the left column contains menu names and short explanation. The right column offers an explanation of the function. The expression "hotkey" refers to the appropriate keyboard buttons. The default values are in bold characters.

The first table contains the parameters of the mount. You find the data in the manual or consult the manufacturer! The default setting is G-40/41/42. The Microstep resolution is managed automatically.

Mount Parameter (hotkey 6)	RA	DEC
Reduction Total reduction of the drive system.	100 - 432 10000	432
MainGear Reduction of the main gear, used for PEC purposes.	100 - 432 10000	---
MotorRes step/rev resolution of the stepper motors.	100/ 200 /400	100/ 200 /400
Rotation L/R This defines the default rotation of the motors. Will depend on actual wiring of the motors. Set it so that tracking is correct.	Left/Right	On hotkey 4. for DEC
MountType	Germ/Fork (F disables swap tube and E/W of Meridian menu in Initialize)	
TrackCurr Tracking current (used up to 2x tracking speed)	800 mA (600 is the recommended minimum)	
GoToCurr The current applied to motors in GoTo.	1000 mA	

StopCurr The current applied to motors in standstill	400 mA (Should not be much smaller than tracking curr. to avoid jump at start.)
Encoder res Incremental encode resolution	The encoders of the servo motors and the independent encoders can be specified here.
Motor Type The motor used on the mount	Stepper or Servo

The table below is an overview of all other (user dependent) hand controller menu functions.

Menus in **red** are ready after Initializing and correct parameter entry (Init, E/W, Lat/Long, Time) only.

Function	Description	
User Parameter Setup (hotkey 6 and down)	RA	DEC
Guiding speed	1-9 (9=sidereal)	
Center	10 (1 = 6x sidereal)	
Find	20	
Slew	50	
GoTo speed Can be set separately for RA and DEC.	Max 9999 (7deg/sec)	Max 9999 (7deg/sec)
Ramp All telescopes must accelerate and decelerate. Otherwise the mount will be damaged soon.	1-9 1=small acceleration	1-9 9=high acceleration
Backlash compensation	Not available here	Enter in min, sec of arc.
Swap tube delay	You can enter a delay (in seconds) for the DEC rotation to start later than the RA.	
Pole crossing On/Off	Enables pole crossing for GoTo commands. The mount will not rotate 180 deg in RA if you want to look at the Northern sky.	
Latitude-Longitude in decimals Your observing site's data. The optional GPS module updates it automatically.	The longitude is negative to the East (0,-180) and positive to the west (0, 180)	

<p>Autostop Global Slew West to the point where you want the tube to stop! This is the RAlimit parameter (Enter the menu, select Ralimit and Save!). Now make a swap tube or re-initialize on the other side and repeat the procedure on the Eastern side! Select ON to enable the function!</p>	<p>The mount will stop at the preset RA (saved as distance from the Meridian) limits. Using the joystick, you can slew the mount to cross the limits. To mobilize the mount after Autostop, slew out of the limit first, then select Sidereal rate. Goto commands going over the limit will be preceded by a flip.disabled. S appears on display if the mount has been stopped.</p>	
<p>Autostop Local Select your object to be tracked first ! Then take the tube in RA to the West until the desired Stop position (where the tube would hit he pier)! Now enter the menu, select RAlimit and save the position! Go back to your object, reenter the menu and select ON and relax. The mount will switch into Still rate when it reaches the limit.</p>	<p>To mobilize the mount after Autostop, slew East first, then select Sidereal rate.</p> <p>This function is designed for sleepy astrophotographers.</p> <p>S appears on display if stopped.</p>	
<p>Home pos.save This is the sleeping position of the telescope in your observatory. Slew the scope to this position, enter the menu and save! Works only with valid geographical position and time.</p>	<p>There is an internal battery that keeps the clock running when the unit is switched off. Next time you switch it ON, you can skip Initialize.</p>	
<p>Active speed (only with hotkey 0) Selects the active speed for the joystick.</p>	<p>Menu available with hotkey 0, or select directly with hotkeys 2,3 (guide speed and progressive).</p>	
<p>Refraction correction (this is the real time King rate in both directions, plus correction for GoTo positioning)</p>	<p>On/Off r on display</p>	<p>On/Off r on display</p>
<p>Guest mode enter your password (four digit) and select ON. Only the joystick slew function is active now.</p>	<p>To exit, press Initialize (hotkey-), enter your password! If you forget your PIN: power Off/On.</p>	

Umod sp.lim Stepper driving mode limiting speed.	The first value is the speed limit for the voltage mode in acceleration, the second value is for deceleration. Above the limits current mode is used.	
GoTo mode Slects goto logic	See p. „Using the Intelligent Features”	
Read GPS prompts Pulsar2 to read time and position from a GPS.	Set NMEA 4800 baud on your GPS	
Set User rate 1,2,3 (hotkey 7 and up) This rate is superimposed on the tracking rate.	Min,sec,1/100s per minute of time	Deg, min, sec per minute of time
Rate select (hotkey 7)		
Sidereal (default)		
Lunar rate (sec/hr, "/hr)		
Solar rate (sec/hr, "/hr)		
Still e.g.: for terrestrial viewing.	Coordinates will be updated when you exit to Sidereal.	
User Defined Rate 1,2,3	Min, sec, 1/100 sec per minute of time	Deg, min, sec/ minute of time
Initialize (hotkey -)		
Select ref object Initializing on reference objects.	Use the databases here! Pulsar will ask for E/W meridian position.	
RA+DEC set	Enter coordinates of the reference object directly.	
Time+Date set	Enter the date and time (in UT)!	
Time Date Sid	Check time here!	
Guided init	Enters the guided initializing mode that is the default when switching the unit on.	
GoTo (Hotkey GoTo)	Warning: positions below the horizon are not accessible!	
Select Catalogue Star, M,NGC,USER	You can write your own database in Excel.csv format (for any catalogue, not just user) See the example star.csv below!	

Swap tube (only with hotkey1, long press)	Enabled when the tube and the object (where the telescope points) are on the same side of the Meridian. If Autostop global limits are set and Swap tube is enabled, meridian flip will be automatic before GoTo (if necessary to avoid the autostop zone)
GoTo RA DEC	Slews to coordinates.
GoTo Alt Az	Slews to Alt-Az coordinates.
GoTo Home (only with hotkey 5, long press) Programming: The mount must be in the desired home position. Enter the User Para menu, Home Pos/Save!	Takes the mount to the user programmed home position. If you turn the unit off this way, it will be ready for use when you switch it on - without initializing again. Long pressing when parked un parks the driver.
PEC (hotkey 8)	
Pec On/Off For RA pec. p on display shows the status.	The PEC data is not lost after upgrade.
New PEC Wait for the beep to start corrections! Double beep indicates the end.	Starts the learning period. Guide speed is automatically selected, PEC is turned off. After saving the PEC data the correction is automatically turned on in RA.
System (hotkey 6 and up)	
U/Temp	Shows supply voltage and internal temperature of the driver unit.
Reset All Resets all system values.	Use only when there is a software problem. Resets parameters to default.
Backlight	Sets illumination level of the LCD.
Clock adust (the entered value is not affected by upgrades)	You can correct clock frequency here to increase long term accuracy. Unit: seconds/10 days Example: you have measured the internal clock to be fast 46secs in 10 days. So you enter +46
IP settings	For direct internet access via Ethernet
Encoders	Shows actual encoder position for debugging
Upgrade	See p.,,Upgrading the firmware”

Restart	Program restart without losing settings.
----------------	--

Troubleshooting

1. [The mount does not track.](#)

Still rate selected (e.g.: auto stop function activated)

You connected the DEC cable to the RA motor. (two connector models only)

2. [The mount tracks in the wrong direction.](#)

RA motor rotation incorrect. See: Initialize!

3. [Significant RA drift in tracking.](#)

Clock error not corrected. See the system menu in the table above!

Incorrect rate selected (e.g.: Lunar, Solar, User, instead of Sidereal).

Incorrect mount/motor parameters. Check the setup menu!

Refraction correction disabled or incorrect (Initializing info incorrect).

Note: you can correct any residual drift with the user rate. This correction will be accurate for the actual sky position only.

4. [GoTo command not executed.](#)

The object is below the horizon.

Incorrect date/time or geographical position setting. See: Initialize.

The object is over the autostop limit and pole crossing is disabled.

5. ["Knocking" of the DEC motor at start \(affects guiding precision\)](#)

Stop current too low. Increase to match the tracking current (setup menu)!

6. ["Knocking" of the RA motor during tracking.](#)

Supply voltage too low.

Tracking current too low. Adjust in Mount setup!

Power supply problem. (Switching mode power controllers are not recommended.)

7. [Mount goes the wrong way in DEC during GoTo or manual slew.](#)

DEC motor rotation setup skipped or you crossed the meridian manually.
Joystick direction swapped accidentally (N/S button pressed).

8. Swap tube command is not accepted.

The actual scope position and the tube are not on the same side of the Meridian.
Setup information is incorrect (including E/W of Meridian).
Swap tube is disabled (see the menu).

9. PEC does not function

PEC turned off (no p on the display appears). Missing magnet in the RA coupling. Magnet inserted with the wrong side out (applicable only if the magnet has been removed). Faulty sensor or contact problem at the mount end.
Broken cable.

10. Large GoTo error


Incorrect polar alignment. Database error (check the coordinates). Motor stalled during the goto (low supply voltage, small goto current, too high goto speed).

11. Controller accidentally pushed to upgrade mode

You must do the upgrade.:-(

Key to the icons of the keyboard

1. Press briefly: swap E/W button setup, press for 3 sec: Swap tube
 - 2 Select Guide speed
 - 3 Select Progressive speed (one push of the joystick gives an offset of cca. 10")
 - 4 Press briefly: Swap N/S button setup, press for 3 sec.: reverse DEC rotation
 - 5 Goto Home position (press for 3 sec)
 - 6 Setup
 - 7 Select tracking rate
 - 8 PEC menu
 - 9 Press briefly: Recalibrate (after GoTo),
 - 10 Select active speed
- CE (clear entry or Escape) GoTo menu
- (toggle +/- sign for coordinate entry) Initialize, Exit Guest mode (PIN needed)
Press any button to emergency stop a GoTo!

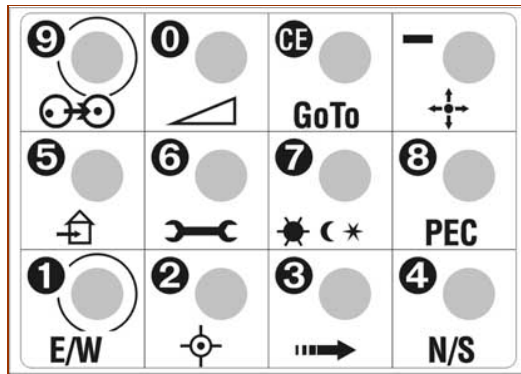

LX200 compatibility

The Pulsar2 controller accepts many commands from LX200 compatible software. To see the list please visit the Pulsar page at www.astronomy.hu/pulsar.htm Coordinates are handled in the full or compressed format, according to the request of the planetarium software.

Planetarium programs tested with Pulsar2: Desktop Universe, Guide7, The Sky, Skymap Pro, Carte du Ciel.

(note: The Sky does have port problems under W.Millennium. Disable Power Management!)

Autoguider port

Pulsar2 accepts Meade CCD type autoguider cables. Earlier SBIG cameras with Dsub connectors will need an adapter. Details are on the Pulsar homepage. The


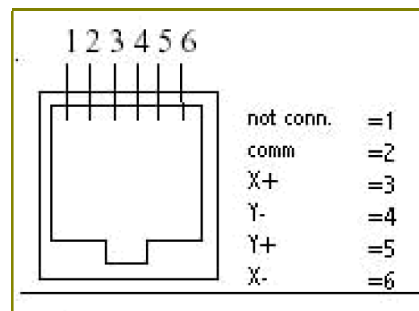


image below shows the Pulsar2 autoguider socket pinout. STV needs a reversed cable, STAR2000 a direct cable.

Auxiliary port (8 pin)

The auxiliary port may be used for:

- 1)connecting a GPS unit (serial port),
- 2)connecting an external parking signal (e.g.:cloud sensor),
- 3)and other devices that may be useful.

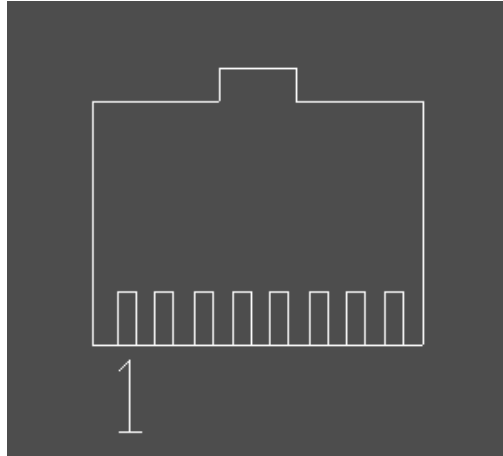

Front view of the Auxiliary connector

- 1) 15V
- 2) External Parking
- 3) bus +
- 4) 3,3 V
- 5) GND (GPS D9 pin5)
- 6) bus -
- 7) RS232 out (GPS D9 pin3)
- 8) RS232 in (GPS D9 pin2)

Catalogue data download

Catalogue data download (the catalogues are in Excel csv format)

- 0 Connect the unit (power ON) to the USB port of the PC
- 1 Start the program Pulsar Commander (Please download!)
- 2 Open the (virtual) COM port you are using
- 3 Select the catalogue you want to program in the pull down window of the Init menu (you can overwrite the name here e.g.: USER to Double)
- 4 Load the catalogue from its directory
- 5 Click "Send Catalogue"
- 6 Wait for the "Sent" message (may take several minutes for larger databases)


A Star, Messier and NGC database is available now (as preloaded before shipping). The following data fields are defined: Star (500), Messier (500), User (500), IC (8000), Pk (8000), Planet (8000) NGC (9999). The numbers in parentheses are the capacity limits in entries.

Example for database structure

Excel file format: (csv extension, values must be separated by ;)

Serial 9999	hh	mm	ss	deg	min	sec	Mag	Data 1 chr	Data Const 1 chr 4chr	Name 10chr
28	19	50	47	8	52	6	0,77	0	0 Aql	Alp Aql
45	2	7	10	23	27	45	2	0	0 Ari	Alp Ari

Display (1st line from table above)

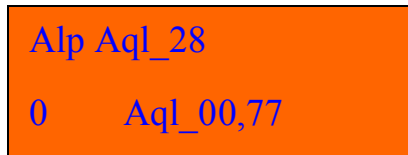

Alp Aql_28
0 Aql_00,77

You can write your own User Database (500 entry) and can edit all other databases.

"The Deep Sky 2000 program is very nice in producing an EXCEL table via SQL commands. From the result only some columns have to be removed and resorted. So it's an easy task to fill the Pulsar tables." G.W. Austria

Hardware options

The standard shipping package includes:

Driver unit

Hand Controller with 2m cable

Power cord extension with banana plugs, alligator clips, cigar lighter pug, RCA plug (please specify)

You will need a standard A-B type USB cable to connect Pulsar2 to a PC.

Options:

Longer cable for the Hand Controller (specify)

PEC encoder and cable (standard with G-42 mount)

Autoguider cable (specify CCD)

GPS cable adapter

GEMINI TELESCOPE DESIGN